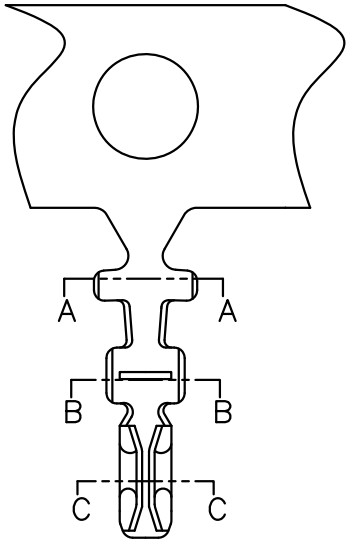

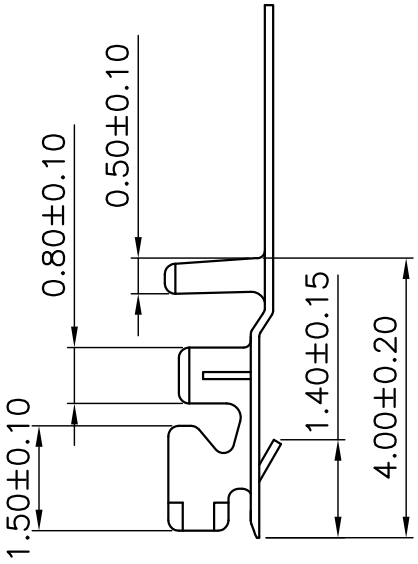

SPECIFICATIONS

Voltage rating: 50V AC, DC
Current rating: 1.0A AC/DC
Withstanding Voltage: 500V AC/minute
Insulation resistance: 100M Ωmin
Temperature range: -25 ℃ - +85℃
Contact resistance: 20mΩ max

TERMINAL

Part No: SCT1001T
Thickness: 0.12mm
Material: Phosphor. Bronze, Tin Plated.
Wire Range: AWG#28-#32 (OD0.8mm)
Reel Q'ty: 20,000 pcs/reel



A—A



B—B

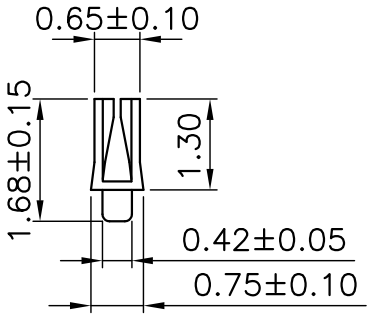

C—C

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	——	——

OPERATION		DRAW	Micky.Liu	2006/05/02
~ 10	±0.15	DESIGN		
20 ~ 30	±0.30			
30 ~	±0.50	CHECK	Judy.Huang	2006/05/02
Angle	± 2'	APPROVE	Hellen.Li	2006/05/02
DIM	TOL			

SCALE		SCT 森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
UNIT	mm		
SIZE	A4	PART NO.	SCT1001T
SHEET	1/1	TITLE:	SH1.0 TERMINAL
PROJ.		DRAWING NO.	SCT1001