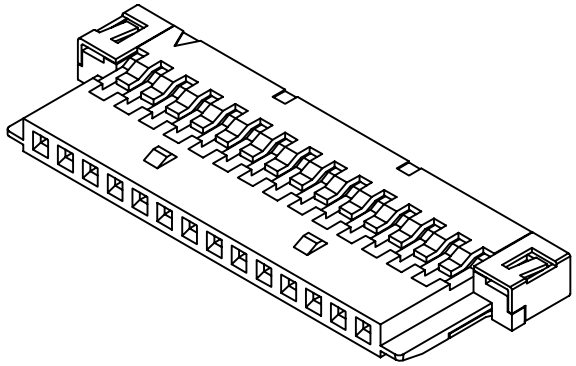

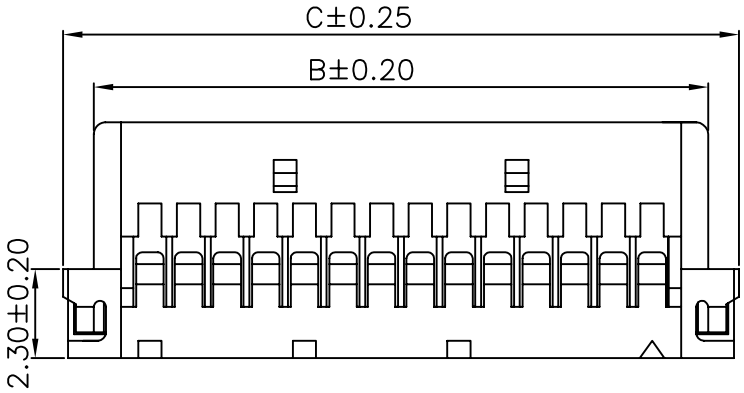

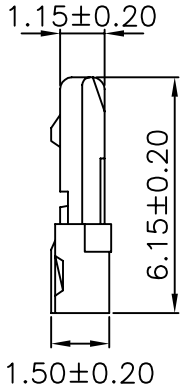

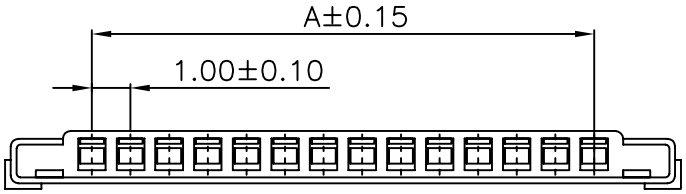

SPECIFICATIONS

Voltage rating: 100V AC,DC

Current rating: 0.5A AC/DC

Withstanding Voltage:300V AC/minute

Insulation resistance:100MΩmin

Temperature range:-25℃ - +85℃

Contact resistance:30mΩ

HOUSING

Part No: SCT1009-XXP

Poles:8,14P,20P,30P

Material:PA66,UL94V-0

PART NO	DIMENSION		
	A	B	C
SCT1009H-08P	7.00	9.90	11.50
SCT1009H-14P	13.00	15.90	17.50
SCT1009H-20P	19.00	21.90	23.50
SCT1009H-30P	29.00	31.90	33.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	Judy.Huang	2006/05/02
DESIGN		
CHECK	Micky.Liu	2006/05/02
APPROVE	Hellen.Li	2006/05/02

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

PART NO.	SCT1009H-XXP
TITLE:	HRS DF19 1.0mm Housing
DRAWING NO.	SCT1009