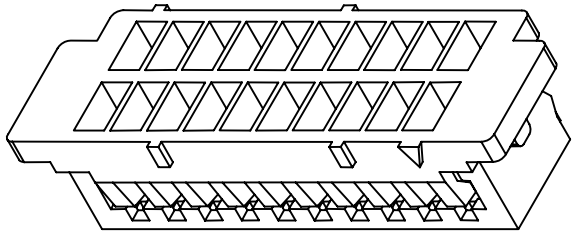

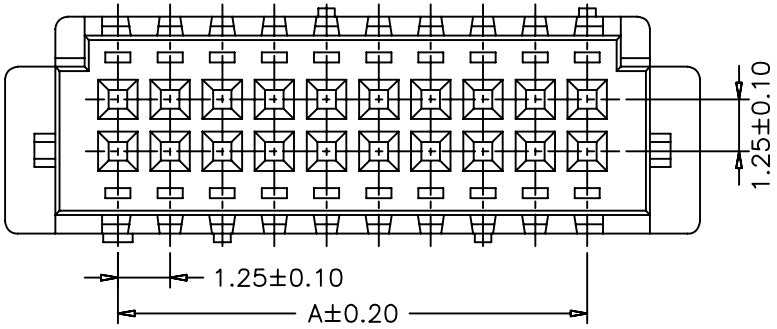

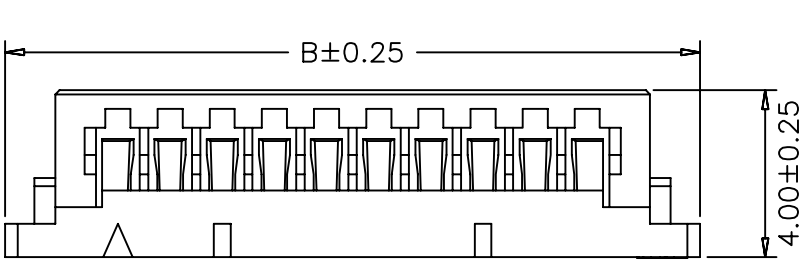



SPECIFICATIONS

Voltage rating: 150V AC,DC
Current rating: 1A,AC,DC(AWG#28)
Withstanding voltage: 500V AC/minute
Insulation resistance:500MΩmin
Temperature range:-40℃ - +85℃
Contact resistance:20mΩ max

HOUSING

Part No.:SCT1252H-2xXXP
Poles:2-15P
Material:Nylon 66 UL94V-0
Q'TY: 1,000 pcs/bag

PART NO.	Dimensions	
	A	B
SCT1252H-2X05P	5.00	10.40
SCT1252H-2X10P	11.25	16.65
SCT1252H-2X15P	17.50	22.90
SCT1252H-2X20P	23.75	29.15

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

OPERATION				
~ 10	±0.15	DRAW	Judy.Huang	2006/05/02
20 ~ 30	±0.30	DESIGN		
30 ~	±0.50	CHECK	Micky.Liu	2006/05/02
Angle	± 2°	APPROVE	Hellen.Li	2006/05/02
DIM	TOL			

SCALE		SCONDAR 森康达电子有限公司	
UNIT	mm	SCONDAR ELECTRONIC LIMITED	
SIZE	A4	PART NO.	SCT1252H-2xXXP
SHEET	1/1	TITLE:	DF13 1.25 2xXXP HOUSING
PROJ.		DRAWING NO.	SCT1252H-2xXXP