


SPECIFICATIONS

Voltage rating: 150V AC, DC
 Current rating: 1A, AC, DC (AWG#28)
 Withstanding voltage: 500V AC/minute
 Insulation resistance: 500MΩ min
 Temperature range: -40°C - +85°C
 Contact resistance: 20mΩ max

HOUSING

Part No.: SCT1252H-XXP
 Poles: 2-15P
 Material: Nylon 66 UL94V-0
 Q'TY: 1,000 pcs/bag

PART NO	DIMENSION		
	A	B	C
SCT1252H-02	1.25	3.00	4.00
SCT1252H-03	2.50	4.25	5.25
SCT1252H-04	3.75	5.50	6.50
SCT1252H-05	5.00	6.75	7.75
SCT1252H-06	6.25	8.00	9.00
SCT1252H-07	7.50	9.25	10.25
SCT1252H-08	8.75	10.50	11.50
SCT1252H-09	10.00	11.75	12.75
SCT1252H-10	11.25	13.00	14.00
SCT1252H-11	12.50	14.25	15.25
SCT1252H-12	13.75	15.50	16.50
SCT1252H-13	15.00	16.75	17.75
SCT1252H-14	16.25	18.00	19.00
SCT1252H-15	17.50	19.25	20.25

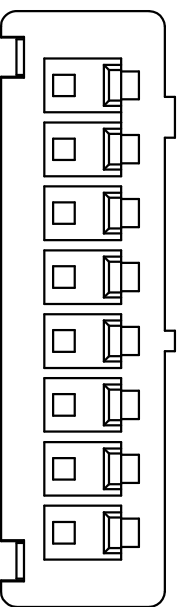

OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE	森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
~ 10 ~ 30	DESIGN			mm	PART NO.	SCT1252H-XXP
30 ~ Angle	CHECK	Micky.Liu	2006/05/02	A4	TITLE:	DF13 1.25 HOUSING
± 2' DIM	APPROVE	Hellen.Li	2006/05/02	SHEET 1/1	DRAWING NO.	SCT1252H-XXP
± 2' TOL	APPROVE			PROJ.		
NEW	CHANGE DESCRIPTION					
05/12/27	DATE					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		