


**SPECIFICATIONS**

Voltage rating: 150V AC, DC  
 Current rating: 1A, AC, DC (AWG#28)  
 Withstanding voltage: 500V AC/minute  
 Insulation resistance: 500M  $\Omega$  min  
 Temperature range: -40°C - +85°C  
 Contact resistance: 20m  $\Omega$  max

**TERMINAL**

Part No.: SCT1252T  
 Thickness: 0.15mm  
 Material: Phosphor. Bronze  
 Wire Range: AWG#28-#32 (OD1.0mm)  
 Reel Q'ty: 15, 000pcs

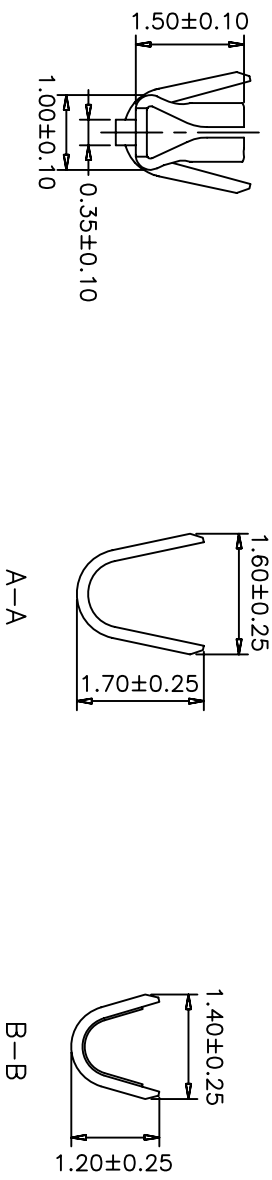

OPERATION		DRAW		SCALE		 <b>森康达电子有限公司</b> SCONDAR ELECTRONIC LIMITED	
~ 10	±0.15	JUDY HUANG	2006/05/02	mm			
DESIGN		CHECK		UNIT	SIZE	PART NO.	SCT1252T
20 ~ 30	±0.30	MICKY LIU	2006/05/02	A4	1/1	TITLE:	DF13 1.25 TERMINAL
ANGLE		APPROVE		SHEET	PROJ.	DRAWING NO.	SCT1252T
30 ~	±0.50	HELLEN LI	2006/05/02	1/1			
DIM TOL							
± 2'							
CHANGE		APPROVE					
DESCRIPTION							
NEW							
DATE							
05/12/27							
REV							
0							

1 2 3 4 5 6 7 8 9 10