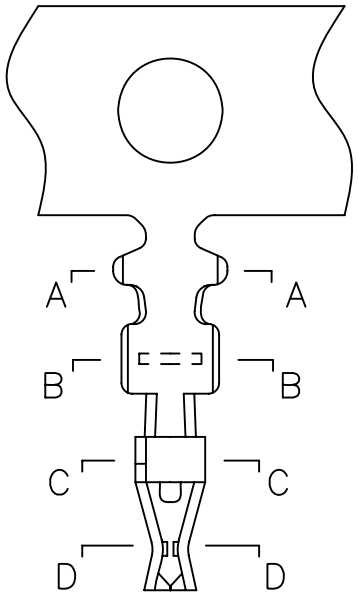

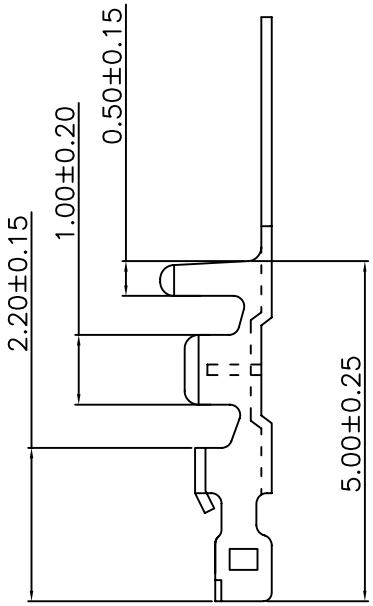

SPECIFICATIONS

Voltage rating: 150V AC,DC
Current rating: 1A,AC,DC(AWG#28)
Withstanding voltage: 500V AC/minute
Insulation resistance:500MΩmin
Temperature range:-40°C - +85°C
Contact resistance:20mΩ max

TERMINAL
Part No.:SCT1253T
Thickness:0.15mm
Material:Phosphor.Bronze,Tin plated
Wire Range:AWG#28-#32(OD0.8mm)
Reel Q'ty: 10,000 pcs/reel



A–A



B–B



C–C

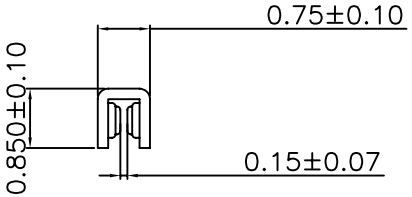

D–D

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	———	———

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	CHENA	05/12/25
DESIGN		
CHECK	Micky	05/12/25
APPROVE	HELLEN	05/12/25

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

PART NO.	SCT1253T
TITLE:	DF14 1.25 TERMINAL
DRAWING NO.	SCT1253