


PCB Layout

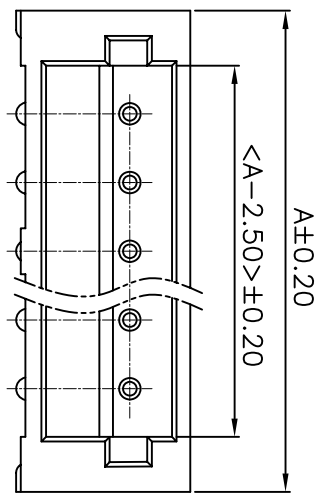

SPECIFICATIONS

Voltage rating: 100V AC, DC  
 Current rating: 1A, AC, DC (AWG#26)  
 Withstanding Voltage: 500V AC/minute  
 Insulation resistance: 500M  $\Omega$  min  
 Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C  
 Contact resistance: 20m $\Omega$  max

WAFER  
 Part No: SCT1501WR-S-XXPT  
 Poles: 02-16  
 Material: Nylon 46, UL94V-0  
 Cotact: Brass, Tin plated  
 Q' TY: 1000 pcs/bag

PART NO.	Dimensions	
	A	B
SCT1501WR-S-02PT	6.00	1.50
SCT1501WR-S-03PT	7.50	3.00
SCT1501WR-S-04PT	9.00	4.50
SCT1501WR-S-05PT	10.50	6.00
SCT1501WR-S-06PT	12.00	7.50
SCT1501WR-S-07PT	13.50	9.00
SCT1501WR-S-08PT	15.00	10.50
SCT1501WR-S-09PT	16.50	12.00
SCT1501WR-S-10PT	18.00	13.50
SCT1501WR-S-11PT	19.50	15.00
SCT1501WR-S-12PT	21.00	16.50
SCT1501WR-S-13PT	22.50	18.00

OPERATION	DRAW	SCALE	UNIT
~ 10	Judy.Huang	2006/05/02	mm
20 ~ 30	DESIGN		
30 ~	CHECK	2006/05/02	A4
Angle	Micky.Liu		SHEET 1/1
DIM	Hellen.Li	2006/05/02	PROJ.
TOL	APPROVE		

SCONDAR	森康达电子有限公司
SCONDAR ELECTRONIC LIMITED	SCT1501WR-S-XXPT
PART NO.	ZH1.5 SMT 90C WAFER
TITLE:	
DRAWING NO.	SCT1501WR-S

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----