
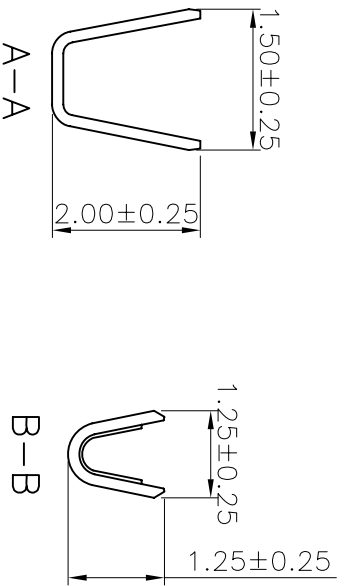


SPECIFICATIONS
 Voltage Rating: 125V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT2002T
 Wire Range: AWG#24-#28 (OD1.4mm)
 Material: Phos. Bronze
 Finish: Tin Plated
 Thickness: 0.15mm
 Q'TY: 10,000PCS/Reel

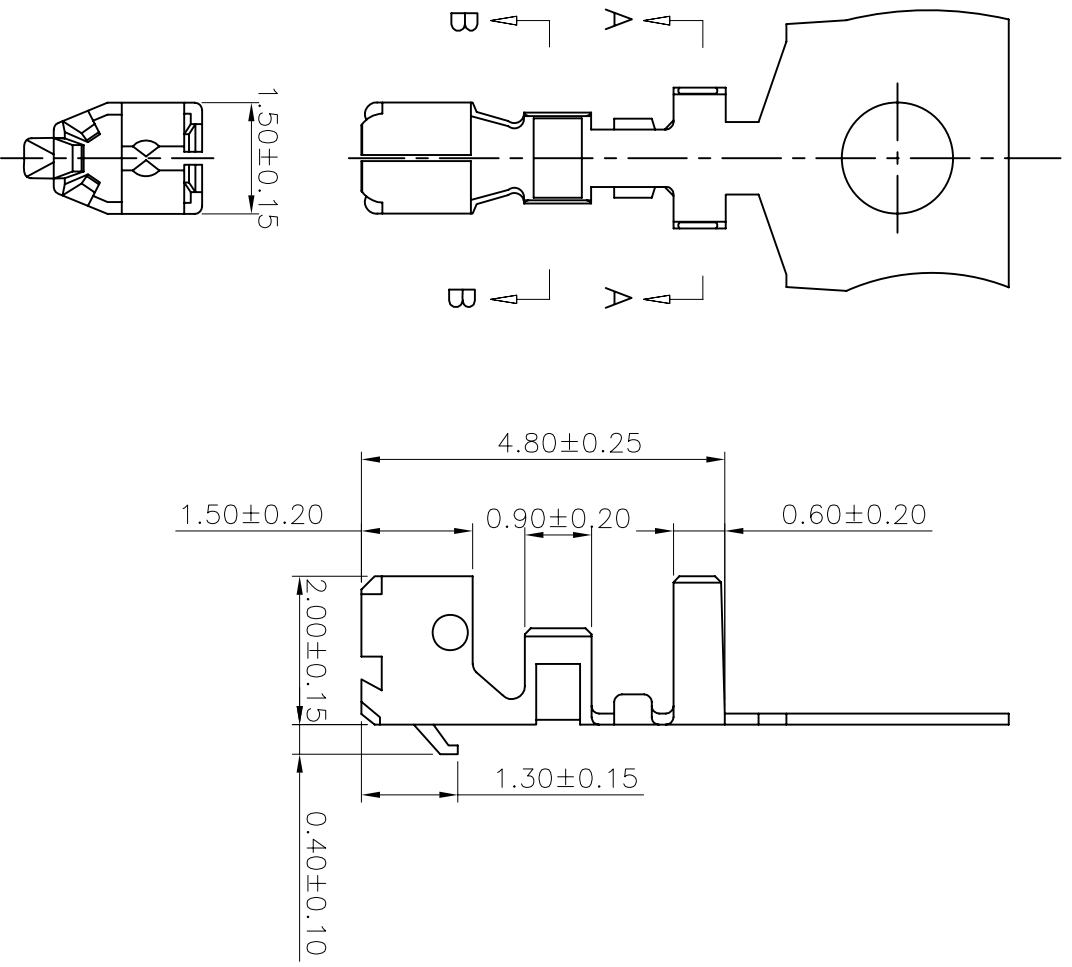

OPERATION	~ 10	±0.15	DRAW	Judy, Huang	2014/09/25	SCALE	SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
DESIGN	20 ~ 30	±0.30	CHECK	Micky, Liu	2014/09/25	UNIT	mm	
ANGLE	30 ~	±0.50	APPROVE	Hellen, Li	2014/09/25	SIZE	A4	
DIM	± 2'					SHEET	1/1	
TOL.						PROJ.	DRAWING NO.	
							SCT2002T	
							Molex51004 2.0mm Terminal	
							SCT2002T	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		
1				