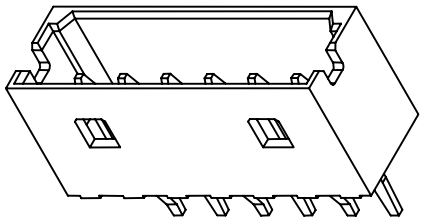

SPECIFICATIONS
Voltage Rating:125V AC/DC
Current Rating:2A AC/DC
Withstanding Voltage:800V AC/minute
Insulation Resistance:1,000MΩ min.
Temperature Range:−25°C − +85°C
Contact Resistance:20mΩ max

WAFER
Part No: SCT2002WV−XXP
Poles:2−15
Material:Nylon 66,UL94V−0
Pin:Brass,Tin plated

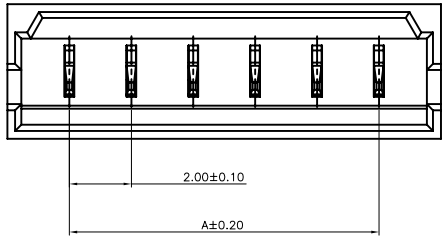



PCB LAYOUT

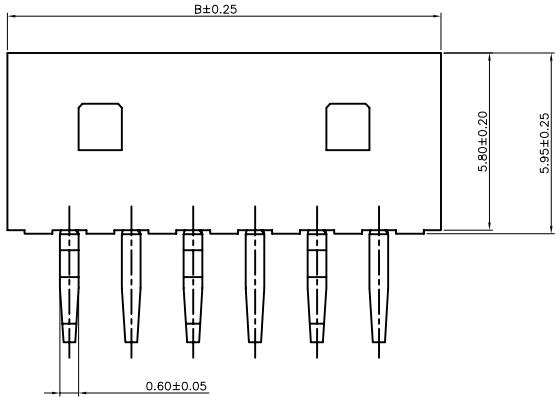

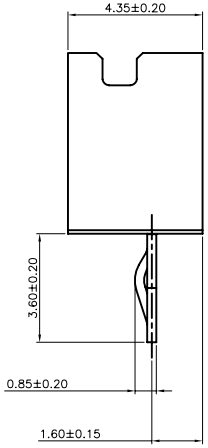

PART NO.	Dimensions	
	A	B
SCT2002WV−2P	2.00	6.00
SCT2002WV−3P	4.00	8.00
SCT2002WV−4P	6.00	10.00
SCT2002WV−5P	8.00	12.00
SCT2002WV−6P	10.00	14.00
SCT2002WV−7P	12.00	16.00
SCT2002WV−8P	14.00	18.00
SCT2002WV−9P	16.00	20.00
SCT2002WV−10P	18.00	22.00
SCT2002WV−11P	20.00	24.00
SCT2002WV−12P	22.00	26.00
SCT2002WV−13P	24.00	28.00
SCT2002WV−14P	26.00	30.00
SCT2002WV−15P	28.00	32.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	Judy.Huang	2014/09/18
DESIGN		
CHECK	Micky.Liu	2014/09/18
APPROVE	Hellen.Li	2014/09/18

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

PART NO.	SCT2002WV−XXP
TITLE:	MX2.0 180C WAFER
DRAWING NO.	SCT2002WV