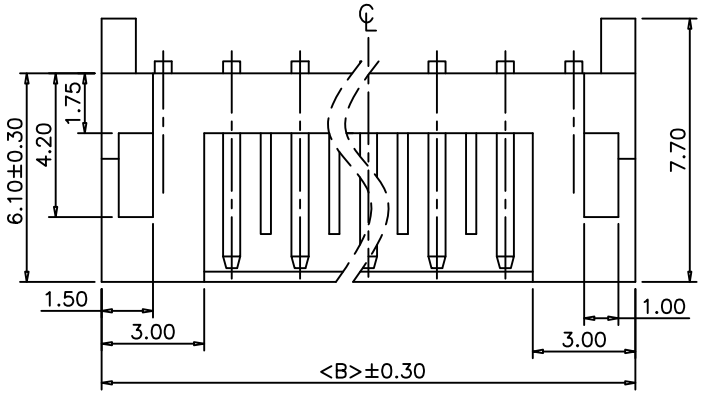

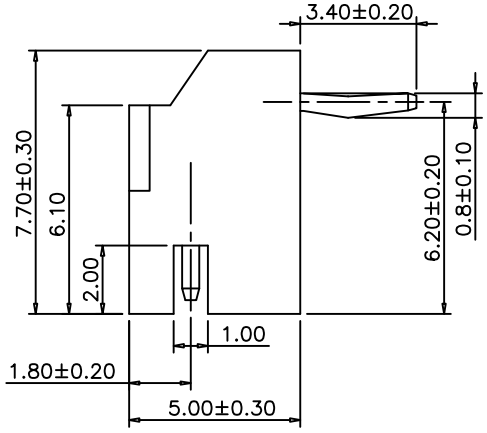

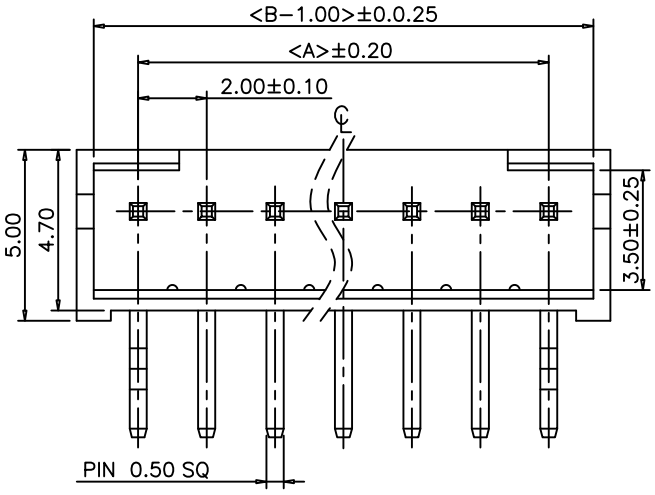

Recommended P.C.B Layout(Top Side)
(Tolerance=±0.05)



SPECIFICATIONS

Voltage Rating: 100V AC/DC
Current Rating: 1A AC/DC
Withstanding Voltage: 800V AC/minute
Insulation Resistance: 1,000MΩ min.
Temperature Range: -25° C ~ +85° C
Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2005WV-XXP
Poles: 2-16
Material: PA 66, UL94V-0

PART NO	DIMENSION	
	A	B
SCT2005WR-02	2.00	6.00
SCT2005WR-03	4.00	8.00
SCT2005WR-04	6.00	10.00
SCT2005WR-05	8.00	12.00
SCT2005WR-06	10.00	14.00
SCT2005WR-07	12.00	16.00
SCT2005WR-08	14.00	18.00
SCT2005WR-09	16.00	20.00
SCT2005WR-10	18.00	22.00
SCT2005WR-11	20.00	24.00
SCT2005WR-12	22.00	26.00
SCT2005WR-13	24.00	28.00
SCT2005WR-14	26.00	30.00
SCT2005WR-15	28.00	32.00
SCT2005WR-16	30.00	34.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

OPERATION		DRAW	YANG	2015.12.08
~ 10	±0.15	DESIGN		
20 ~ 30	±0.30			
30 ~	±0.50	CHECK	Micky.Liu	2015.12.08
Angle	± 2°	APPROVE	Allen	2015.12.08
DIM	TOL			

SCALE		SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
UNIT	mm		
SIZE	A4	PART NO.	SCT2005WR-XXP
SHEET	1/1	TITLE:	JAE2.0 90C WAFER
PROJ.		DRAWING NO.	SCT2005WR