


TYPE	High	Low
C	2.00	1.00

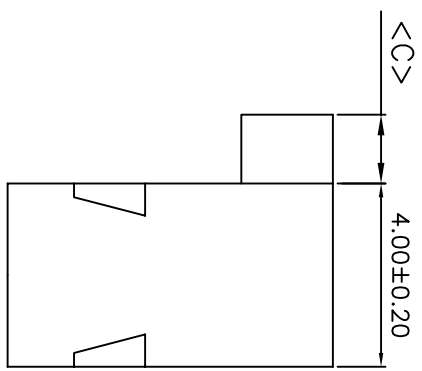

SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING
 Part No: SCT2015HN-2xXXP
 Poles: 2x2-25
 Material: PBT

PART NO.	Dimensions	
	A	B
SCT2015HN-2x02P	2.00	4.30
SCT2015HN-2x03P	4.00	6.30
SCT2015HN-2x04P	6.00	8.30
SCT2015HN-2x05P	8.00	10.30
SCT2015HN-2x06P	10.00	12.30
---	---	---
SCT2015HN-2x 20P	38.00	40.30
SCT2015HN-2x 21P	40.00	42.30
SCT2015HN-2x 22P	42.00	44.30
SCT2015HN-2x 23P	44.00	46.30
SCT2015HN-2x 24P	46.00	48.30
SCT2015HN-2x 25P	48.00	50.30

OPERATION	~ 10	±0.15	DRAW	JUDY	2006.05.09	SCALE	
DESIGN	20 ~ 30	±0.30	CHECK	MICKY	2006.05.09	UNIT	mm
Angle	30 ~	±0.50	APPROVE	HELLEN	2006.05.09	SIZE	A4
DIM	± 2'					SHEET	1/1
TOL						PROU.	◆
CHANGE						TITLE:	Dupont 2.0 Housing
APPROVE						DRAWING NO.	SCT2015

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED

PART NO. SCT2015HN-2xXXP
 TITLE: Dupont 2.0 Housing
 DRAWING NO. SCT2015