
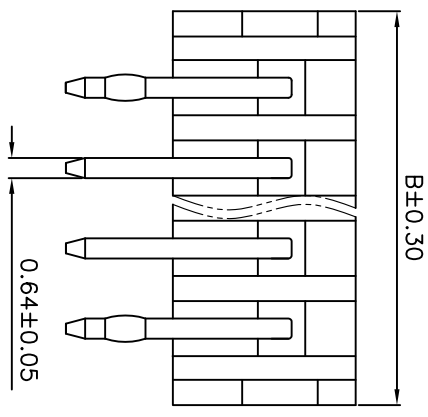


| NO | PART NO | DIMENSION (mm) | |
|----|--------------|----------------|-------|
| | | A | B |
| 1 | SCT2501WR-02 | 2.50 | 7.50 |
| 2 | SCT2501WR-03 | 5.00 | 10.00 |
| 3 | SCT2501WR-04 | 7.50 | 12.50 |
| 4 | SCT2501WR-05 | 10.00 | 15.00 |
| 5 | SCT2501WR-06 | 12.50 | 17.50 |
| 6 | SCT2501WR-07 | 15.00 | 20.00 |
| 7 | SCT2501WR-08 | 17.50 | 22.50 |
| 8 | SCT2501WR-09 | 20.00 | 25.00 |
| 9 | SCT2501WR-10 | 22.50 | 27.50 |
| 10 | SCT2501WR-11 | 25.00 | 30.00 |
| 11 | SCT2501WR-12 | 27.50 | 32.50 |
| 12 | SCT2501WR-13 | 30.00 | 35.00 |
| 13 | SCT2501WR-14 | 32.50 | 37.50 |
| 14 | SCT2501WR-15 | 35.00 | 40.00 |
| 15 | SCT2501WR-16 | 37.50 | 42.50 |

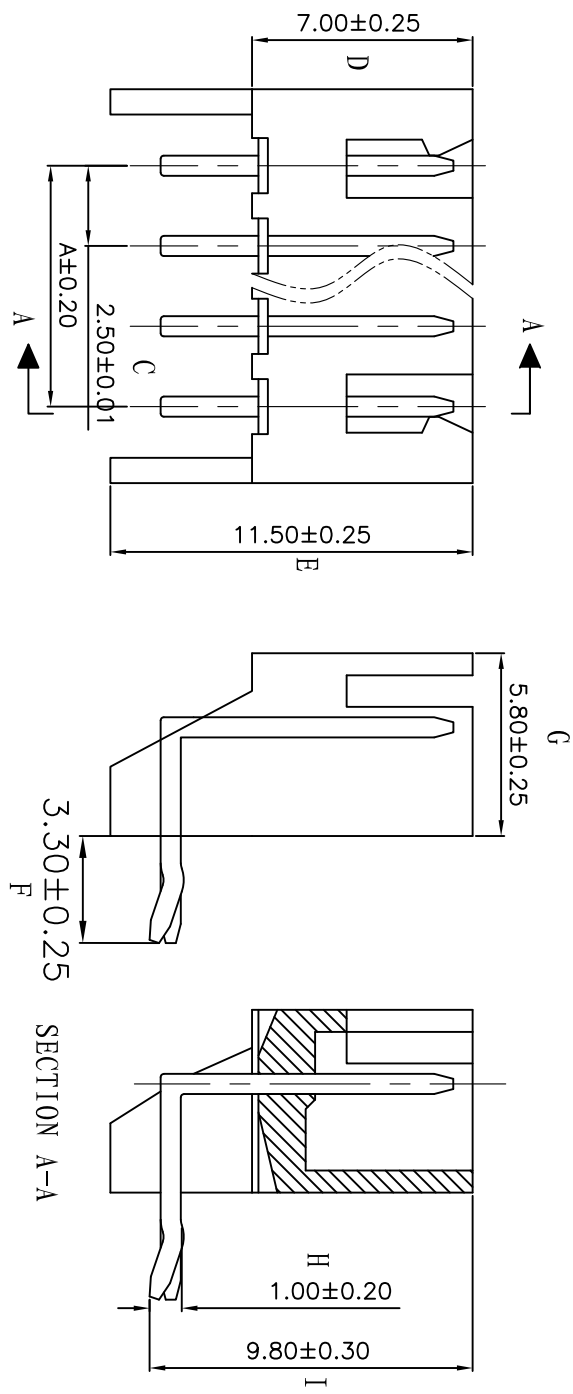

WAFER

- Part No: SCT2501WR-XXP
- Poles: 2-15
- Material: Nylon 66, UL94V-2
- Q'TY: 500, 1000 pcs/bag

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C (including temperature rise in applying electrical current)
- Applicable PC board thickness: 0.063 (1.6mm)
- Contact resistance: Initial Value/10m Ω max After environmental Texting/20m Ω

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | DRAW | CHENA | SCALE | PART NO. |
|-----|----------|--------------------------|--------|---------|--------------------|---------|--------|-------|---------------|
| 1 | 10/12/20 | E=3.40变更为E=3.30MM | | | ~ 10 ± 0.15 | DESIGN | | mm | SCT2501WR-XXP |
| 0 | 05/12/27 | NEW | | | 20 ~ 30 ± 0.30 | CHECK | | A4 | XH2.5 90C WF |
| | | | | | 30 ~ ± 0.50 | CHECK | | 1/1 | |
| | | | | | Angle ± 2 | APPROVE | HELLEN | | |
| | | | | | DIM TOL | | | | |

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED