
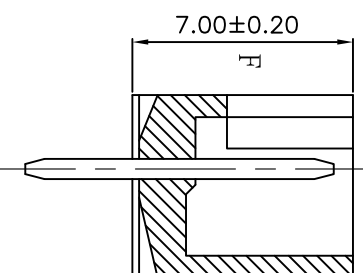
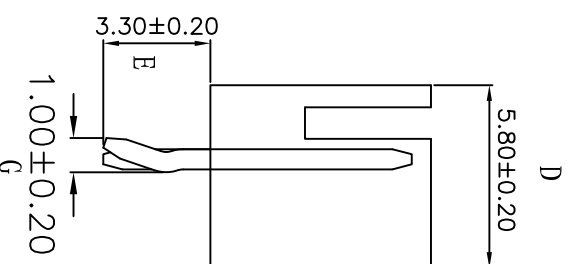


WAFER

- Part No: SCT2501WV-XX
- Poles: 2-15
- Material: Nylon 66, UL94V-2
- Q'TY: 500, 1000 pcs/bag

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 °C - +85°C
- (including temperature rise in applying electrical current)
- Applicable PC board thickness: 0.063 (1.6mm)
- Contact resistance: Initial Value/10m Ω max
- After environmental Texting/20m Ω

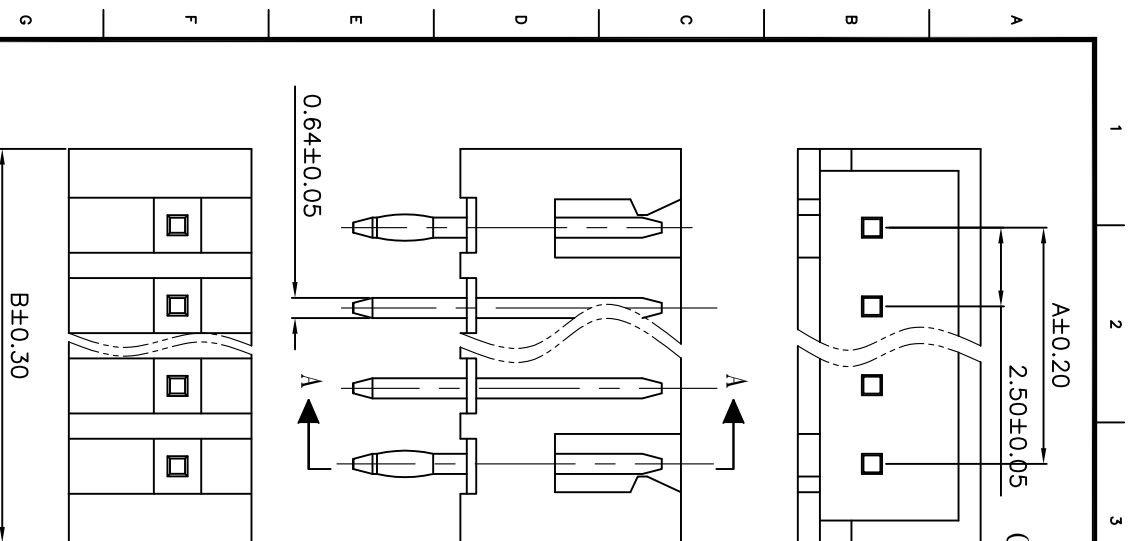

SECTION A-A



NO	PART NO	DIMENSION (mm)	
		A	B
1	SCT2501WV-02	2.50	7.50
2	SCT2501WV-03	5.00	10.00
3	SCT2501WV-04	7.50	12.50
4	SCT2501WV-05	10.00	15.00
5	SCT2501WV-06	12.50	17.50
6	SCT2501WV-07	15.00	20.00
7	SCT2501WV-08	17.50	22.50
8	SCT2501WV-09	20.00	25.00
9	SCT2501WV-10	22.50	27.50
10	SCT2501WV-11	25.00	30.00
11	SCT2501WV-12	27.50	32.50
12	SCT2501WV-13	30.00	35.00
13	SCT2501WV-14	32.50	37.50
14	SCT2501WV-15	35.00	40.00
15	SCT2501WV-16	37.50	42.50

OPERATION		DRAW		CHENA		SCALE	
~ 10	±0.15	DESIGN		05/12/27		UNIT	
20 ~ 30	±0.30	CHECK	MICKY	05/12/28		mm	
30 ~	±0.50	CHECK	MICKY	05/12/28		A4	
Angle	± 2	APPROVE	HELLEN	05/12/28		SHEET	1/1
DIM	TOL	APPROVE	HELLEN	05/12/28		PROJ.	
E=3.40 变更为 E=3.30MM		CHANGE		APPROVE		PART NO.	
NEW						SCT2501WV-XXP	
MODIFICATION DESCRIPTION						TITLE:	
						XH2.5 180C WF	
DATE						DRAWING NO.	
						SCT2501	

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED