








2P, 3P



4P~6P



7P~15P

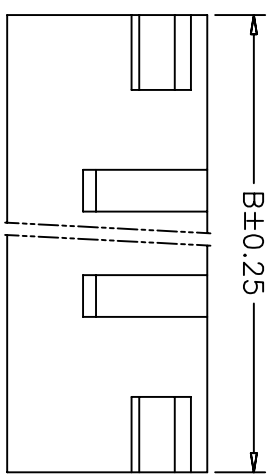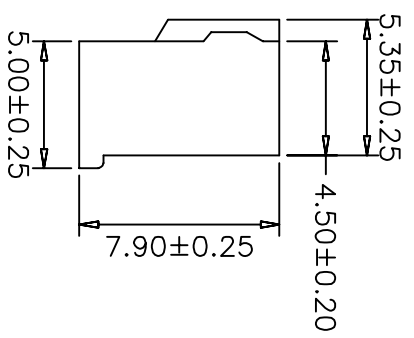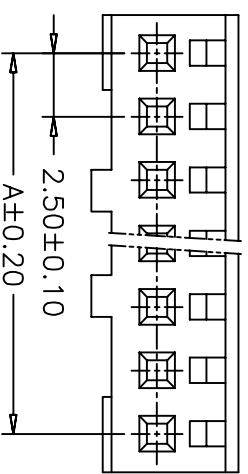

SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING
 Part No: SCT2504H-XXP
 Poles: 2-15
 Material: Nylon 66, UL94V-0

PART NO.	Dimensions	
	A	B
SCT2504H-2P	2.50	5.50
SCT2504H-3P	5.00	8.00
SCT2504H-4P	7.50	10.50
SCT2504H-5P	10.00	13.00
SCT2504H-6P	12.50	15.50
SCT2504H-7P	15.00	18.00
SCT2504H-8P	17.50	20.50
SCT2504H-9P	20.00	23.00
SCT2504H-10P	22.50	25.50
SCT2504H-11P	25.00	28.00
SCT2504H-12P	27.50	30.50
SCT2504H-13P	30.00	33.00
SCT2504H-14P	32.50	35.50
SCT2504H-15P	35.00	38.00

OPERATION	DRAW	CHENA	SCALE	PART NO.	TITLE:
~ 10 ±0.15	DESIGN		mm		
20 ~ 30 ±0.30	CHECK	MICKY	A4		
30 ~ ±0.50	CHECK	HELLEN	1/1		
Angle ± 2'	APPROVE		PROJ.		
DIM TOL	APPROVE				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DATE	DRAWING NO.
0	05/12/27	NEW				SCT2504

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED