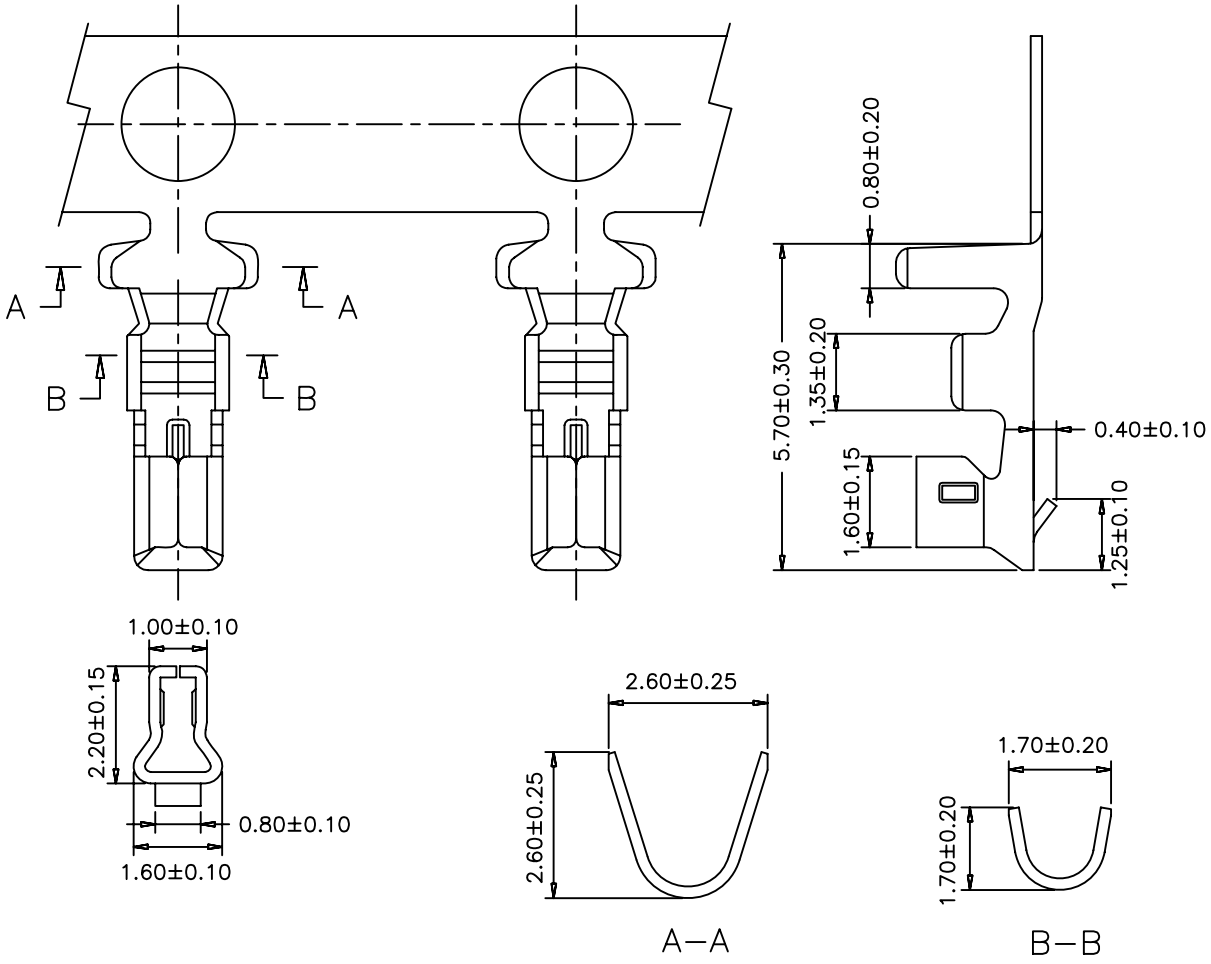

SPECIFICATIONS
Voltage Rating: 250V AC/DC
Current Rating: 3A AC/DC
Withstanding Voltage: 800V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

TERMINAL
Part No: SCT2511T
Wire Range: AWG#22-#28 (OD1.9mm)
Material: Phosphor Bronze
Finish: Tin Plated
Thickness: 0.2mm
Q'TY: 10,000PCS/Reel

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	———	———

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	SIMON	14/11/14	
DESIGN			
CHECK	MICKY	14/11/14	
APPROVE	HELLEN	14/11/14	

SCALE		SCONDAR 森康达电子有限公司	
UNIT	mm	SCONDAR ELECTRONIC LIMITED	
SIZE	A4	PART NO.	SCT2511T
SHEET	1/1	TITLE:	EH2.5 TERMINAL
PROJ.		DRAWING NO.	SCT2511