


P.C.B LAYOUT

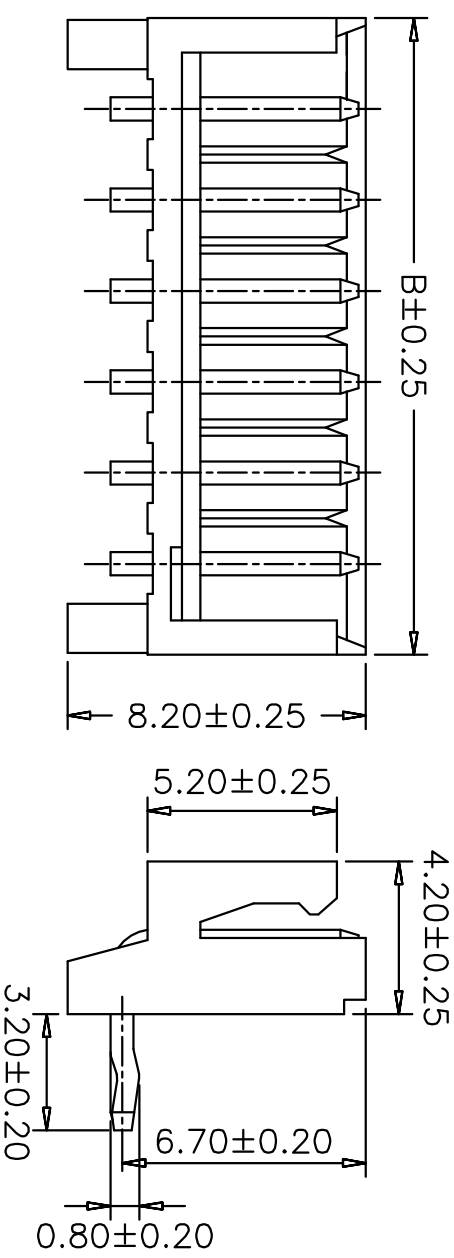

SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

WAFER

Part No: SCT2511WR-XXP
 Poles: 2-15
 Material: Nylon 66, UL94V-0
 Pin: Brass, Tin plated

PART NO.	Dimensions	
	A	B
SCT2511WR-02P	2.50	7.50
SCT2511WR-03P	5.00	10.00
SCT2511WR-04P	7.50	12.50
SCT2511WR-05P	10.00	15.00
SCT2511WR-06P	12.50	17.50
SCT2511WR-07P	15.00	20.00
SCT2511WR-08P	17.50	22.50
SCT2511WR-09P	20.00	25.00
SCT2511WR-10P	22.50	27.50
SCT2511WR-11P	25.00	30.00
SCT2511WR-12P	27.50	32.50
SCT2511WR-13P	30.00	35.00
SCT2511WR-14P	32.50	37.50
SCT2511WR-15P	35.00	40.00

OPERATION	~ 10	±0.15	DRAW	CHENA	05/12/27	SCALE	
	20 ~ 30	±0.30	DESIGN			UNIT	mm
	30 ~	±0.50	CHECK	MICKY	05/12/27	SIZE	A4
ANGLE	± 2'		APPROVE	HELLEN	05/12/27	SHEET	1/1
DIM						PROU.	
DATE	MODIFICATION DESCRIPTION	CHANGE APPROVE				DRAWING NO.	SCT2511
05/12/27	NEW					PART NO.	SCT2511WR-XXP
						TITLE:	EH2.5 90C Wafer
						DRAWING NO.	SCT2511

SCT 森康达电子有限公司
 SECONDAR ELECTRONIC LIMITED