


SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 4A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING
 Part No: SCT2541H-XXPC
 Poles: 2-20
 Material: Nylon 66, UL94V-2

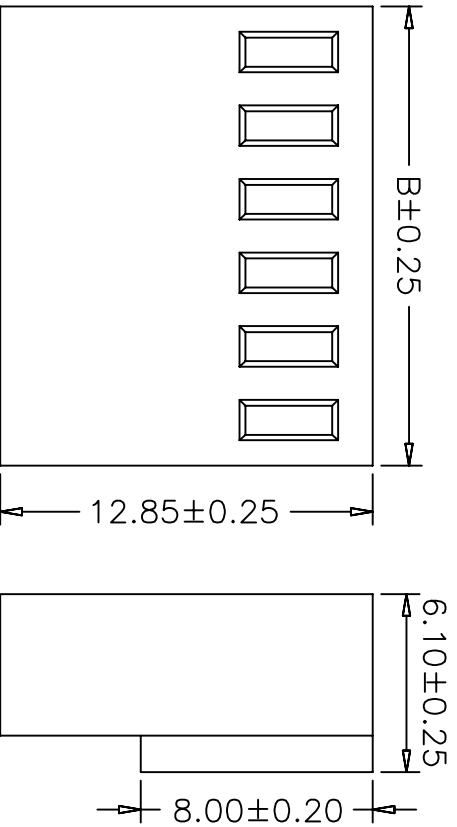

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
SCT2541H-02PC	2.54	5.68	SCT2541H-12PC	27.94	31.08
SCT2541H-03PC	5.08	8.22	SCT2541H-13PC	30.48	33.62
SCT2541H-04PC	7.62	10.76	SCT2541H-14PC	33.02	36.16
SCT2541H-05PC	10.16	13.30	SCT2541H-15PC	35.56	38.70
SCT2541H-06PC	12.70	15.84	SCT2541H-16PC	38.10	41.24
SCT2541H-07PC	15.24	18.38	SCT2541H-17PC	40.64	43.78
SCT2541H-08PC	17.78	20.92	SCT2541H-18PC	43.18	46.32
SCT2541H-09PC	20.32	23.46	SCT2541H-19PC	45.72	48.86
SCT2541H-10PC	22.86	26.00	SCT2541H-20PC	48.26	51.40
SCT2541H-11PC	25.40	28.54			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	CHENA	SCALE	PART NO.	TITLE:	DRAWING NO.
0	05/12/27	NEW			~ 10 ± 0.15	DESIGN		mm	SCT2541H-XXPC	MX2.54 HOUSING	SCT2541
					20 ~ 30 ± 0.30	CHECK	MICKY	A4			
					30 ~ Angle ± 2'	APPROVE	HELLEN	SHEET 1/1			
					DIM TOL	APPROVE		PROJ.			

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED