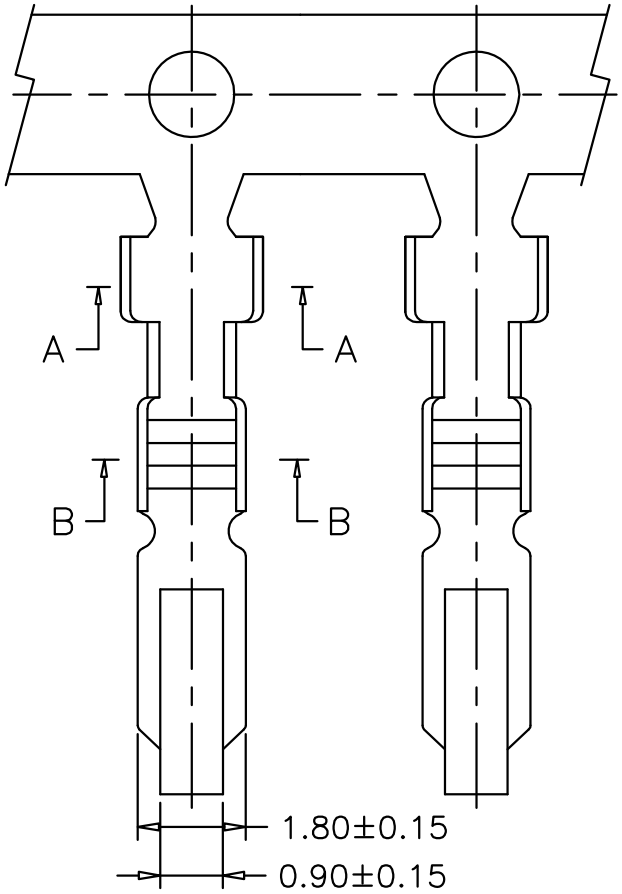

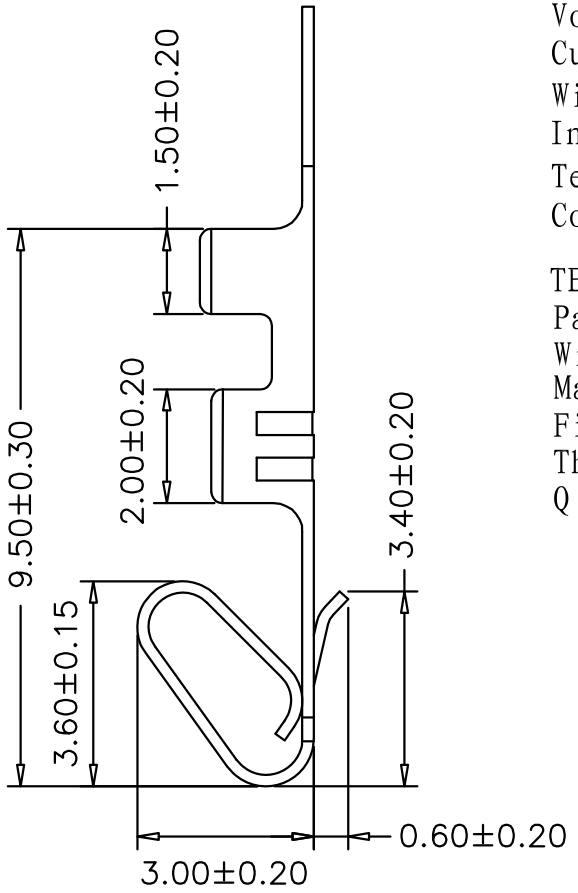

SPECIFICATIONS
Voltage Rating: 250V AC/DC
Current Rating: 4A AC/DC
Withstanding Voltage: 1000V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

TERMINAL
Part No: SCT2541T
Wire Range: AWG#24-#28 (OD1.55mm)
Material: Brass
Finish: Tin Plated
Thickness: 0.2mm
Q'TY: 10,000PCS/Reel





REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	——	——

OPERATION		DRAW	CHENA	05/12/28
~ 10	±0.15	DESIGN		
20 ~ 30	±0.30			
30 ~	±0.50	CHECK	MICKY	05/12/28
Angle	± 2°	APPROVE	HELLEN	05/12/28
DIM	TOL			

SCALE		森康达电子有限公司	
UNIT	mm	S'CONDAR ELECTRONIC LIMITED	
SIZE	A4	PART NO.	SCT2541T
SHEET	1/1	TITLE:	MX2.54 TERMINAL
PROJ.		DRAWING NO.	SCT2541