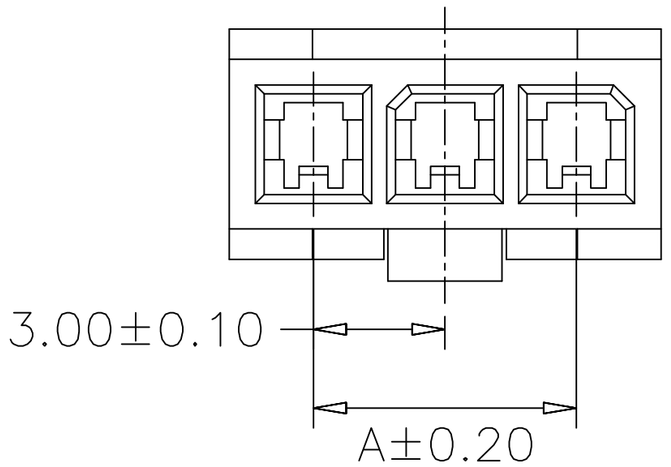

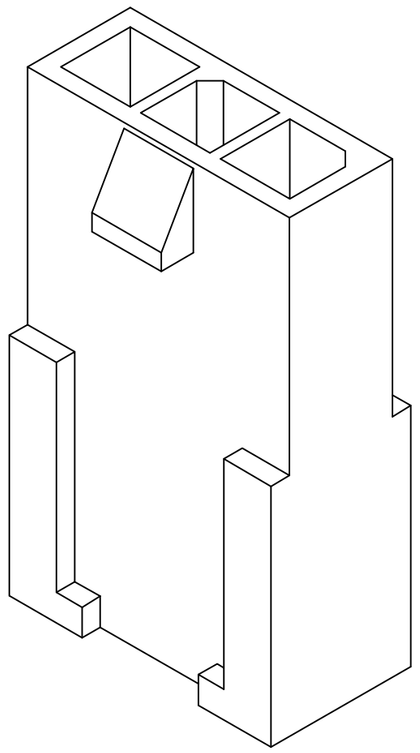

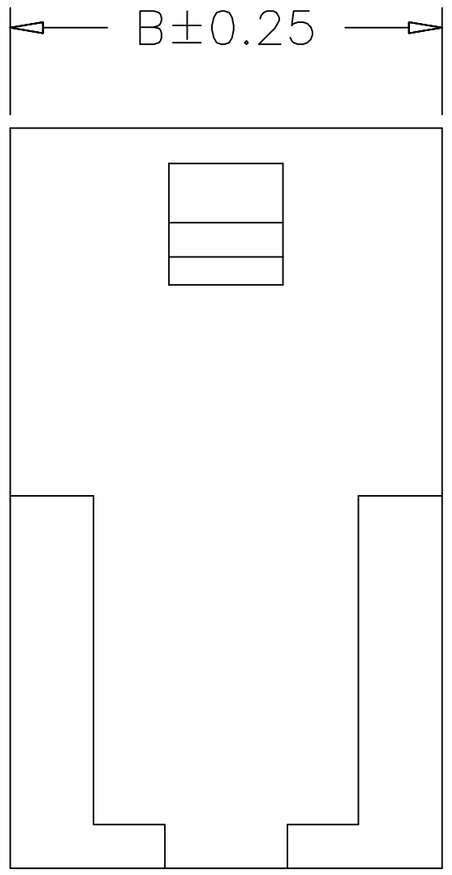

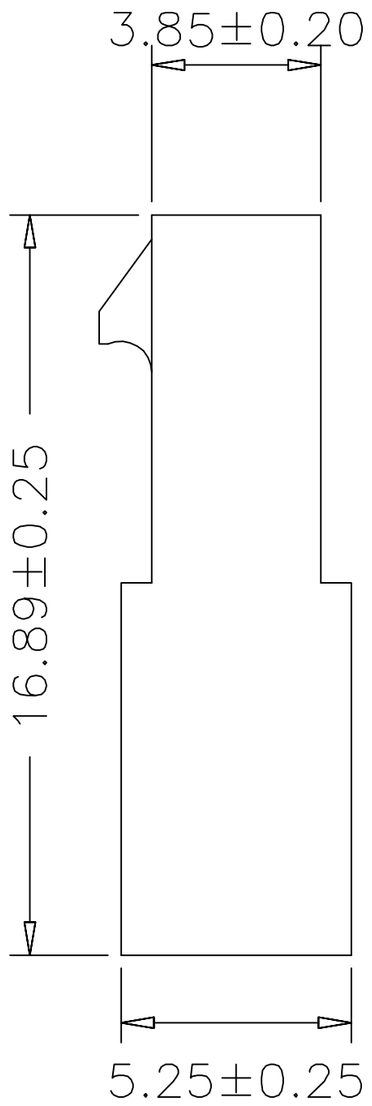

SPECIFICATIONS
Voltage Rating: 250V AC/DC
Current Rating: 5A AC/DC
Withstanding Voltage: 1500V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

HOUSING
Part No: SCT3001FHA-XXP
Poles: 2-12
Material: Nylon 66, UL94V-2

PART NO.	Dimensions	
	A	B
SCT3001FHA-2P	3.00	6.85
SCT3001FHA-3P	6.00	9.85
SCT3001FHA-4P	9.00	12.85
SCT3001FHA-5P	12.00	15.85
SCT3001FHA-6P	15.00	18.85
SCT3001FHA-7P	18.00	21.85
SCT3001FHA-8P	21.00	24.85
SCT3001FHA-9P	24.00	27.85
SCT3001FHA-10P	27.00	30.85
SCT3001FHA-11P	30.00	33.85
SCT3001FHA-12P	33.00	36.85

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW		

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	JUDY	2007.05.09
DESIGN		
CHECK	MICKY	2007.05.09
APPROVE	HELLEN	2007.05.09

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司
S'CONDAR ELECTRONIC LIMITED

PART NO.	SCT3001FHA-XXP
TITLE:	MOLEX3.0 FEMALE HOUSING
DRAWING NO.	SCT3001