


PCB LAYOUT

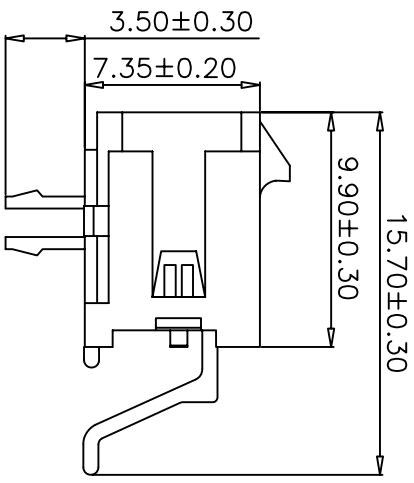

SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 5A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

WAFER

Part No: SCT3001WR-S-E-2xXXP
 Poles: 1-12
 Material: Nylon 66, UL94V-0
 Pin: Brass, Tin plated

PART NO.	Dimensions	
	A	B
SCT3001WR-S-E-2x1P	---	6.65
SCT3001WR-S-E-2x2P	3.00	9.65
SCT3001WR-S-E-2x3P	6.00	12.65
SCT3001WR-S-E-2x4P	9.00	15.65
SCT3001WR-S-E-2x5P	12.00	18.65
SCT3001WR-S-E-2x6P	15.00	21.65
SCT3001WR-S-E-2x7P	18.00	24.65
SCT3001WR-S-E-2x8P	21.00	27.65
SCT3001WR-S-E-2x9P	24.00	30.65
SCT3001WR-S-E-2x10P	27.00	33.65
SCT3001WR-S-E-2x11P	30.00	36.65
SCT3001WR-S-E-2x12P	33.00	39.65

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	DATE	SCALE	UNIT	PART NO.	TITLE	DRAWING NO.
0	05/12/27	NEW				2007.05.09	6:1	mm	SCT3001WR-S-E-2xXXP	MOLEX3.0 90C SMT WAFER	SCT3001

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED

OPERATION	DRAW	JUDY	2007.05.09
~ 10 20 ~ 30	DESIGN		
30 ~	CHECK	MICKY	2007.05.09
Angle DIM		HELLEN	2007.05.09
± 2'	APPROVE		
± 2'	APPROVE		