
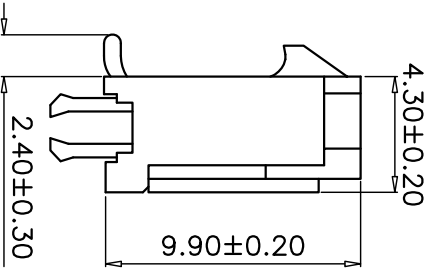


PCB LAYOUT

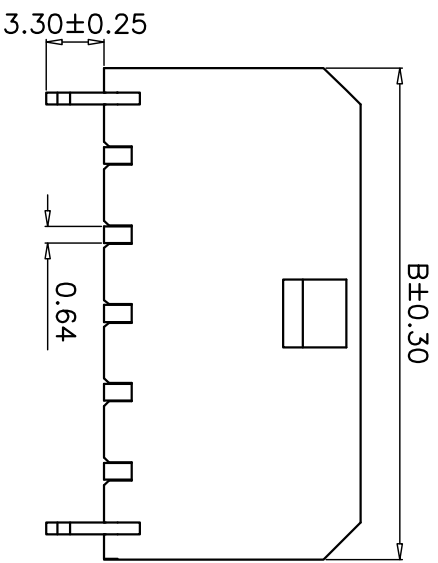

PART NO.	Dimensions	
	A	B
SCT3001WV-S-E-2P	3.00	9.65
SCT3001WV-S-E-3P	6.00	12.65
SCT3001WV-S-E-4P	9.00	15.65
SCT3001WV-S-E-5P	12.00	18.65
SCT3001WV-S-E-6P	15.00	21.65
SCT3001WV-S-E-7P	18.00	24.65
SCT3001WV-S-E-8P	21.00	27.65
SCT3001WV-S-E-9P	24.00	30.65
SCT3001WV-S-E-10P	27.00	33.65
SCT3001WV-S-E-11P	30.00	36.65
SCT3001WV-S-E-12P	33.00	39.65

SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 5A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

WAFER
 Part No: SCT3001WV-S-E-XXP
 Poles: 2-12
 Material: Nylon 66, UL94V-0
 Pin: Brass, Tin plated

OPERATION	DRAW	JUDY	SCALE	SCT	深康达电子有限公司
~ 10 ±0.25	DESIGN		6:1		
20 ~ 30 ±0.30	CHECK	MICKY	UNIT		
30 ~ ±0.50	APPROVE	HELLEN	mm		
Angle ± 2'			A4		
DIM TOL			SIZE		
			1/1		
			SHEET		
			PROJ.		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DATE
0	05/12/27	NEW			