
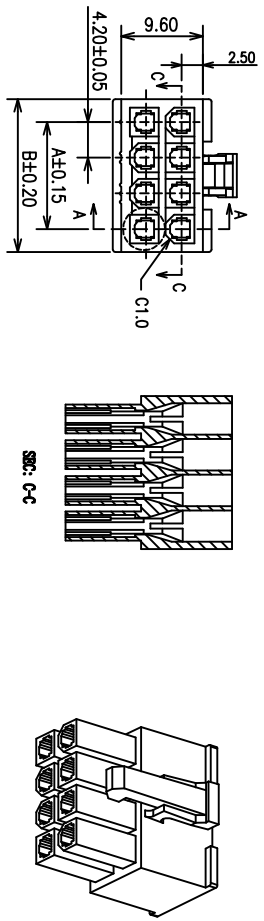
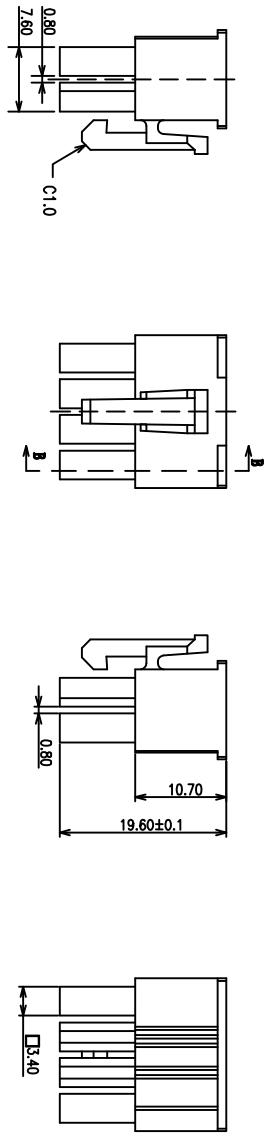


1 2 3 4 5 6 7 8 9 10

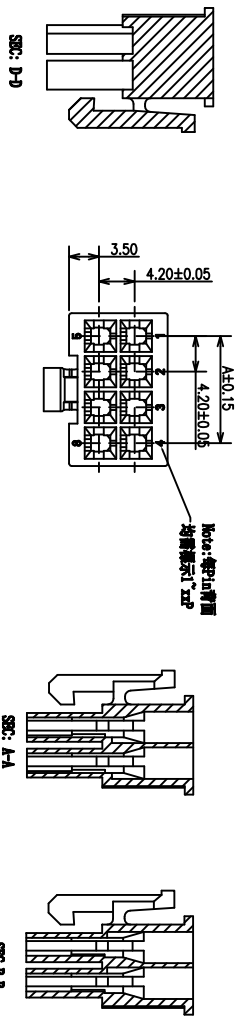

SPECIFICATIONS
 Voltage Rating: 600V AC/DC
 Current Rating: 9A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -40° C - +105° C
 Contact Resistance: 20mΩ max

HOUSING
 Part No: SCT4201MH-2XXXP
 Pole: 2x1-12
 Material: Nylon 66, UL94V-2

PART NO.	Dimensions	
	A	B
SCT4201MH-2X01P	---	5.40
SCT4201MH-2X02P	4.20	9.60
SCT4201MH-2X03P	8.40	13.80
SCT4201MH-2X04P	12.60	18.00
SCT4201MH-2X05P	16.80	22.20
SCT4201MH-2X06P	21.00	26.40
SCT4201MH-2X07P	25.20	30.60
SCT4201MH-2X08P	29.40	34.80
SCT4201MH-2X09P	33.60	39.00
SCT4201MH-2X10P	37.80	43.20
SCT4201MH-2X11P	42.00	47.40
SCT4201MH-2X12P	46.20	51.60

OPERATION	DRAW	JUDY	2016.12.15	SCALE	SCONDAR 森康达电子有限公司	
~ 10	DESIGN			mm	SCONDAR ELECTRONIC LIMITED	
20 ~ 30	CHECK	MICKY	2016.12.14	A4	PART NO.	SCT4201MH-2XXXP
30 ~	CHECK	HELLEN	2016.12.14	1/1	TITLE:	MOLEX4.2 MALE HOUSING
Angle ± 2'	APPROVE			PROJ.	DRAWING NO.	SCT4201
DIM TOL.	CHANGE APPROVE					
	MODIFICATION DESCRIPTION					
	NEW					
0	05/12/27					
REV	DATE					

1 2 3 4 5 6 7 8 9 10

H

G

F

E

D

C

B

A