
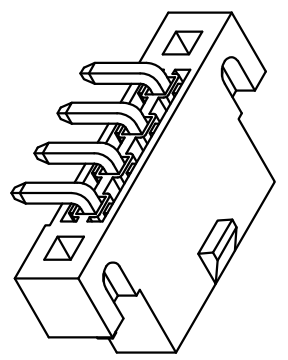


P.C.B LAYOUT

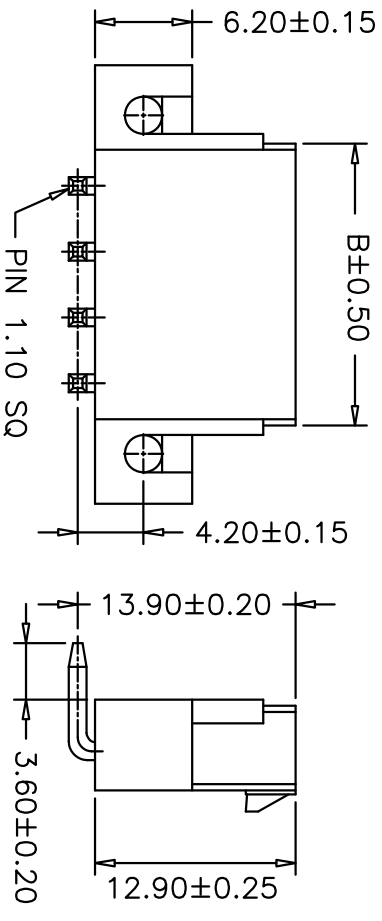

PART NO.	Dimensions	
	A	B
SCT4201WR-E-02P	4.20	9.60
SCT4201WR-E-03P	8.40	13.80
SCT4201WR-E-04P	12.60	18.00
SCT4201WR-E-05P	16.80	22.20

**SPECIFICATIONS**  
 Voltage Rating: 600V AC/DC  
 Current Rating: 9A AC/DC  
 Withstanding Voltage: 1500V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**WAFER**  
 Part No: SCT4201WR-E-XXP  
 Pole: 02-05  
 Material: Nylon 66, UL94V-2  
 Pin: Brass, Tin plated

OPERATION	DRAW	JUDY	SCALE	SCT 森康达电子有限公司 SECONDAR ELECTRONIC LIMITED
~ 10 ±0.15	DESIGN		UNIT	
20 ~ 30 ±0.30	CHECK	MICKY	SIZE	A4
30 ~ ±0.50	APPROVE	HELLEN	SHEET	1/1
Angle ± 2'	CHANGE		PROJ.	◆
DIM TOL.	APPROVE	2007.05.09	DRAWING NO.	SCT4201

REV	DATE	MODIFICATION DESCRIPTION
0	05/12/27	NEW

**SCT** 森康达电子有限公司  
 SECONDAR ELECTRONIC LIMITED

PART NO. SCT4201WR-E-XXP  
 TITLE: MOLEX4.2 90C WAFER