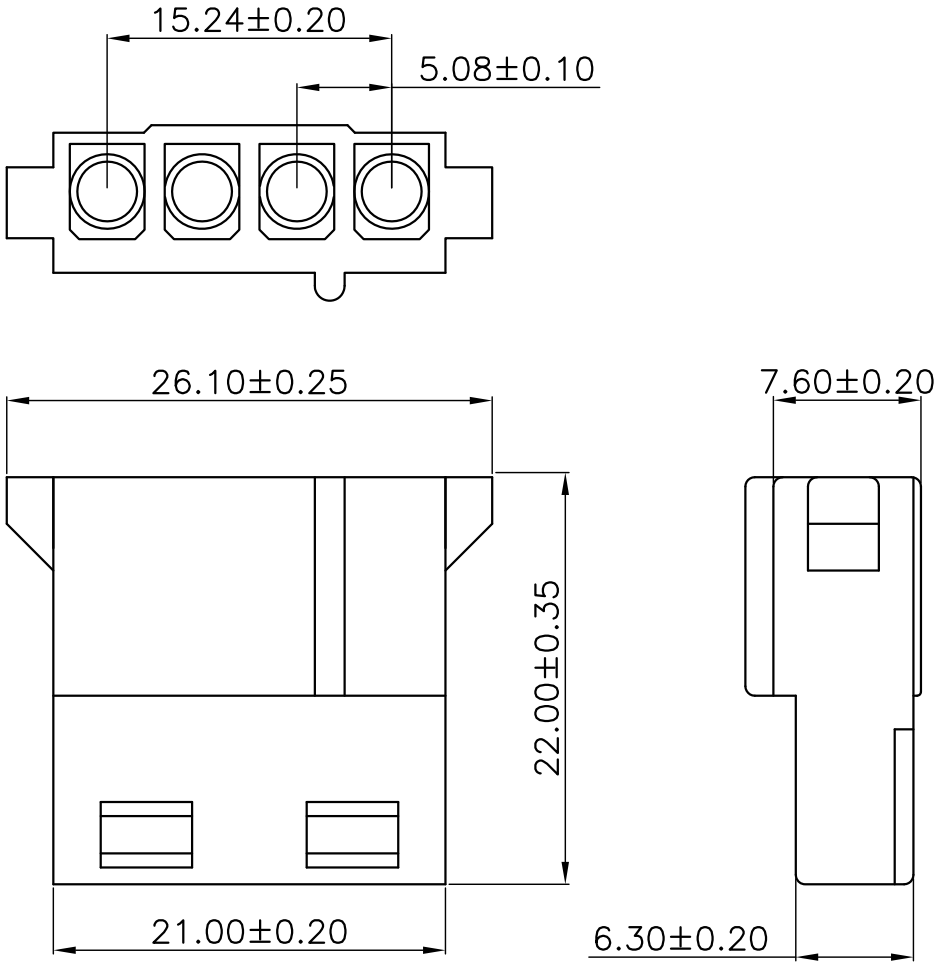

SPECIFICATIONS
Voltage Rating: 250V AC/DC
Current Rating: 10A AC/DC
Withstanding Voltage: 1500V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

HOUSING
Part No: SCT5083MH-04P
Material: Nylon 66, UL94V-2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	——	——

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2'
DIM	TOL

DRAW	JUDY	2007.05.09
DESIGN		
CHECK	MICKY	2007.05.09
APPROVE	HELLEN	2007.05.09

SCALE		SCT 森康达电子有限公司	
UNIT	mm	S'CONDAR ELECTRONIC LIMITED	
SIZE	A4	PART NO.	SCT5083MH-04P
SHEET	1/1	TITLE:	MOLEX8981 MALE Housing
PROJ.		DRAWING NO.	SCT5083